
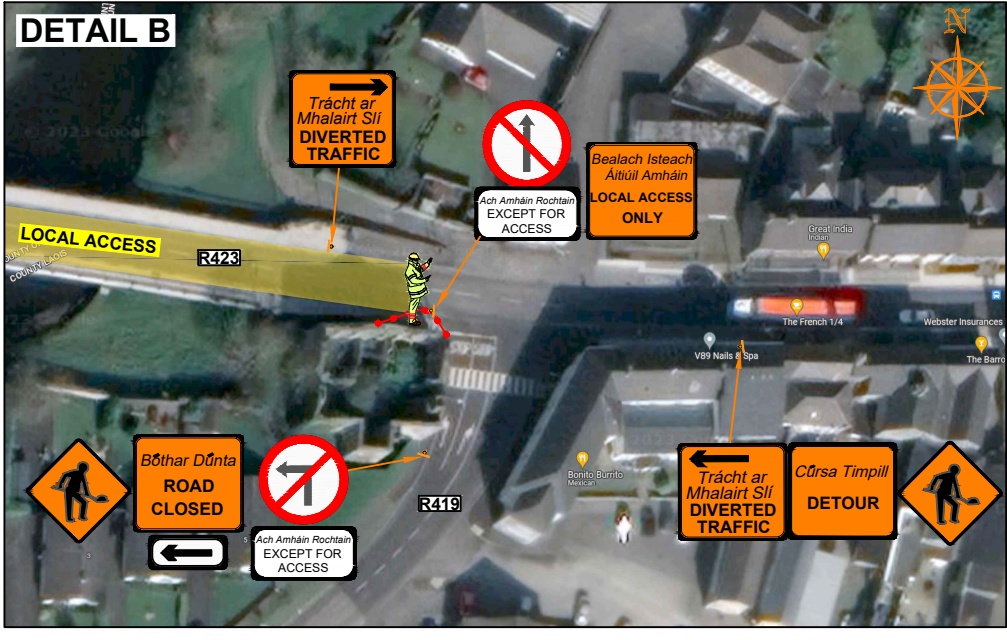
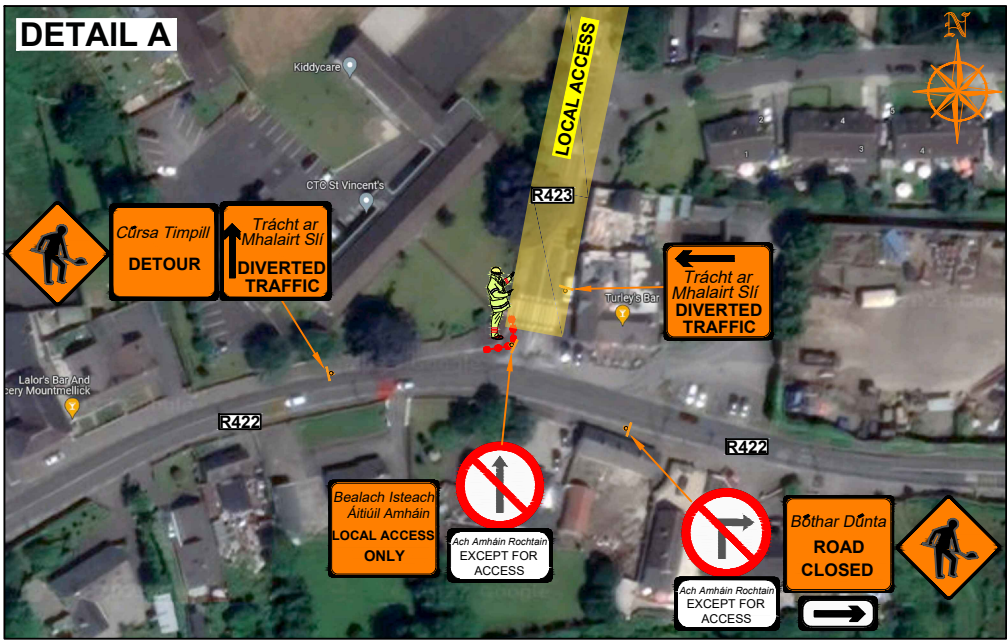
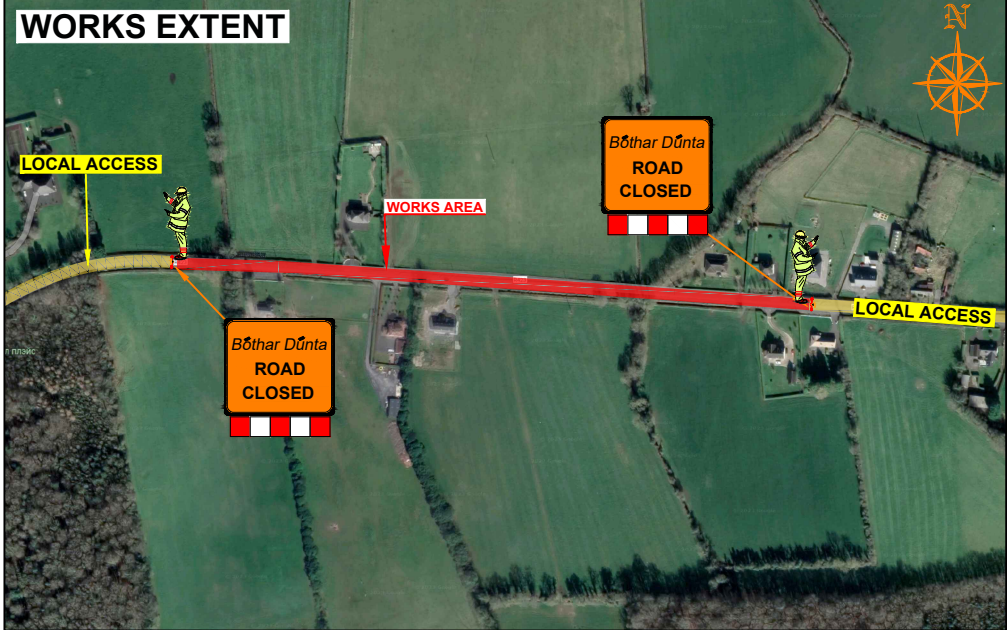


## EMD Roads Programme 2024 Co. Offaly

### DIVERSION ROUTE @ R423 GARRYHINCH PORTARLINGTON

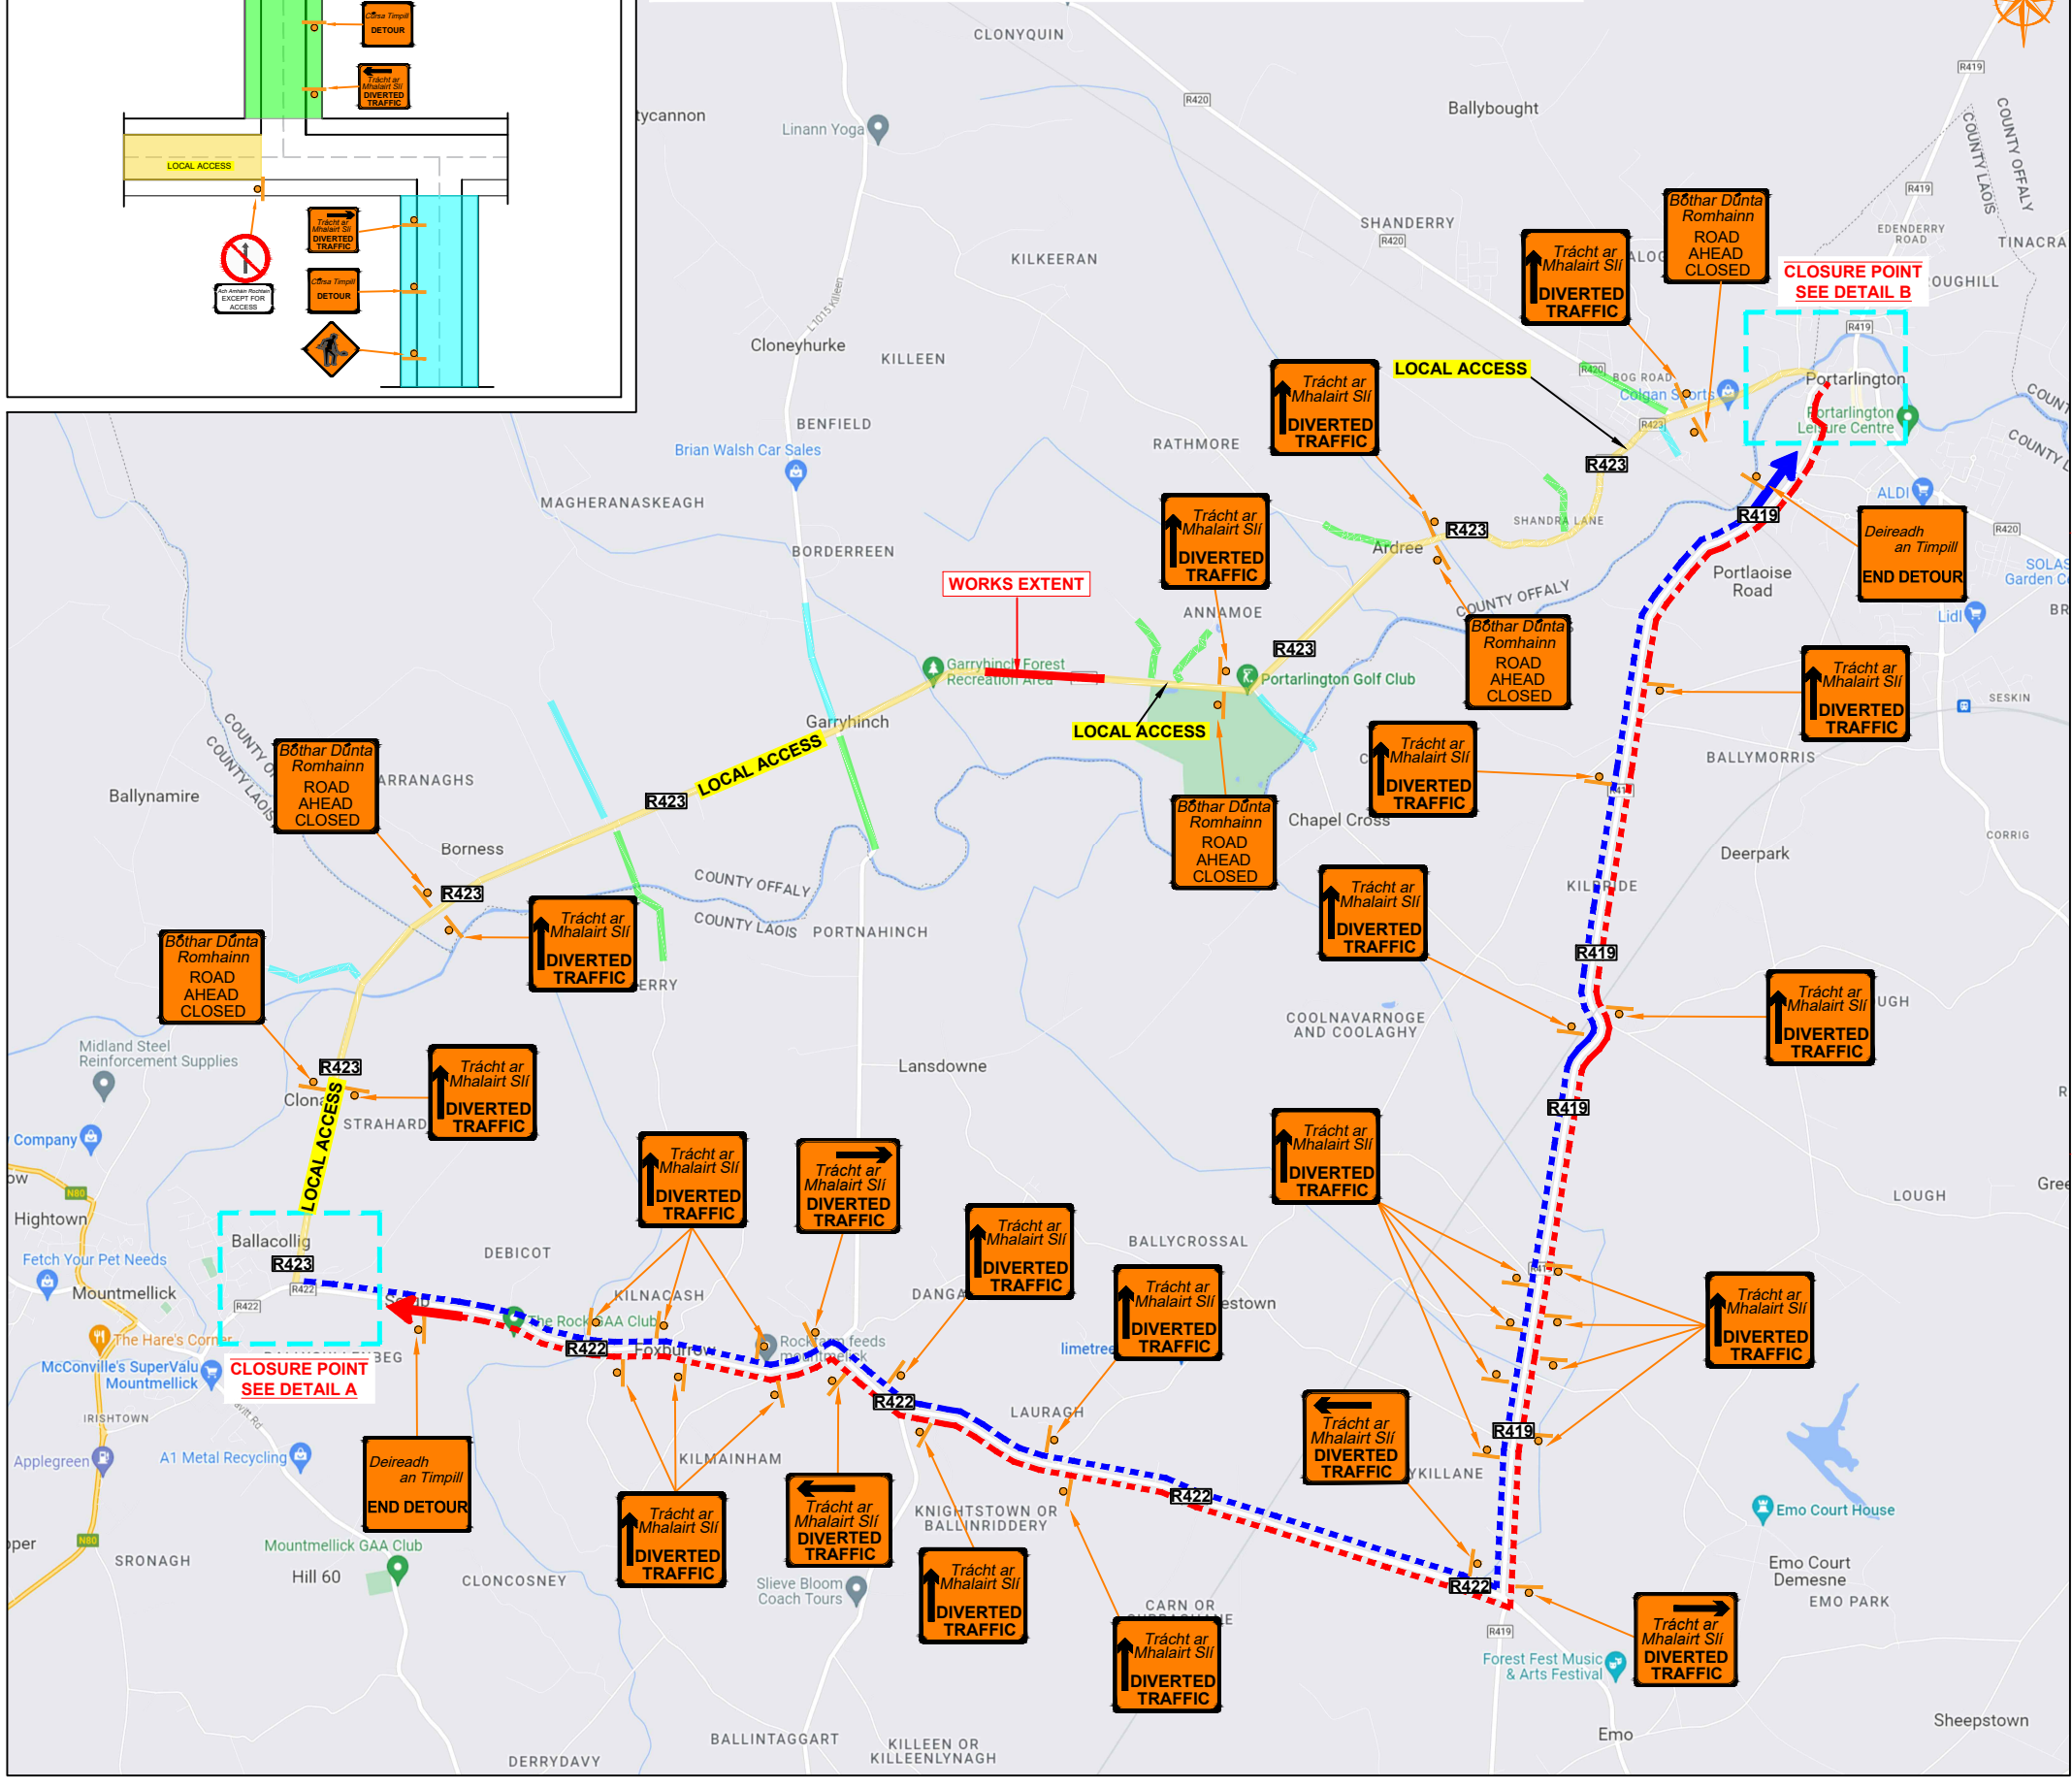

## ROAD CONTROL

Copyright Notes:  
This drawing is the property of Road Control Services Ltd. The design information contained herein is strictly confidential. This document is not to be used, reproduced, disclosed or circulated in whole or in part without prior written consent.

### CLIENT

**Kilsaran**  
ideas taking shape

### DESIGN PARAMETERS

Advance Warning Signage	Sign size 600mm	Sign Visibility 90m	Number of Signs 3	Cumulative Distance 360m	Distance between Advance Warning 120m
<b>Taper</b>	Lane Taper Rate N/A	Hard Shoulder Taper Rate N/A	<b>Safety Zones</b>		
	Longitudinal 45m	Lateral 1.2m	<b>Lanes</b>		
	Lane Width 3.0m				

### LEGEND

[Red X] Work Area
[Orange] Traffic sign
[Red Dotted] Traffic cones
[Red Dotted] Diversion Route A
[Blue Dotted] Diversion Route B
[Yellow] Local Access

### GENERAL NOTES

- All information contained in this drawing (including digital data) should be checked and verified prior to any stage of construction;
- All works are to be carried out in accordance with local authority requirements and are to be included in the site-specific safety & health plan;
- Site inspections and maintenance of the traffic management layout is to be agreed with local authority to ensure the safety and integrity of the design;
- Contractor to carry out a site risk assessment prior to the installation of any traffic management plan to ensure that conditions reflect those considered for design post submission;
- Contractor shall be responsible for the provision of ramp access at any change in road surface level where traffic runs on a temporary surface, and for pedestrian/cycle ramps where footpath/cycle-ways have a level discontinuity as per result of the works.

Rev	Date	Details	Dm	Chk	App	Dm	BC

<b>EMD Roads Programme 2024 Co. Offaly</b>		Project
		Title
		TEMPORARY TRAFFIC MANAGEMENT PLAN @R423-2 GARRYHINCH
Date 26-04-2023		Drawing No C24002_07_012
Scale A1 NTS A3 NTS		Rev 0
Stage CONSTRUCTION		